



**TuffCut® AL
Series 134**



High helix 3 flute design ideal for rapid stock removal in aluminum alloys.

- Unique geometry.
- Improved chip flow and prevents chips from packing in flute.

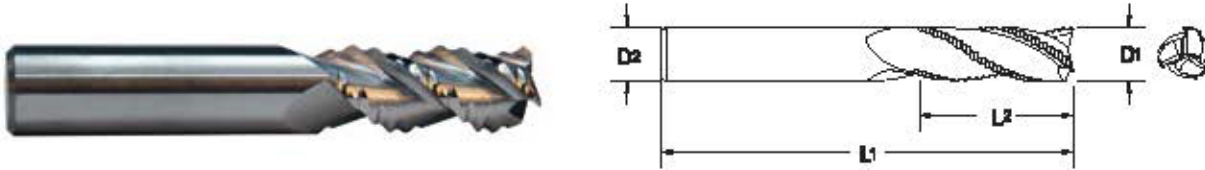

Uncoated		Diameter			Shank		OAL		Flute Length	
		D1			D2 (h6)		L1		L2	
Tool No.	EDP	Inch	mm	Decimal	Inch	mm	Inch	mm	Inch	mm
13423620	13409		6.0	.2362		6.0		64		20.0
13425000	13411	1/4		.2500	1/4		2-1/2		3/4	
13431500	13414		8.0	.3150		8.0		64		20.0
13437500	13417	3/8		.3750	3/8		2-1/2		7/8	
13439370	13419		10.0	.3937		10.0		70		25.0
13447240	13423		12.0	.4724		12.0		76		25.0
13460000	13425	1/2		.5000	1/2		3		1-1/4	
13466120	95321		14.0	.5512		14.0		89		30.0
13462990	13429		16.0	.6299		16.0		89		30.0
13470870	13430		18.0	.7087		18.0		102		35.0
13475000	13431	3/4		.7500	3/4		4		1-1/2	
13478740	13433		20.0	.7874		20.0		102		38.0
13498430	13435		25.0	.9843		25.0		127		50.0
13410000	13401	1		1.0000	1		5		2	

Inch	
D1	Tolerance
1/4 - 1	+0.00/-0.005

Metric (mm)	
D1	Tolerance
6.00 - 25.00	+0.00/-0.127



ISO 9001:2015 Certified

